

2212
2511


Guide plate, VDI 3357
导板, VDI 3357



2212



2511

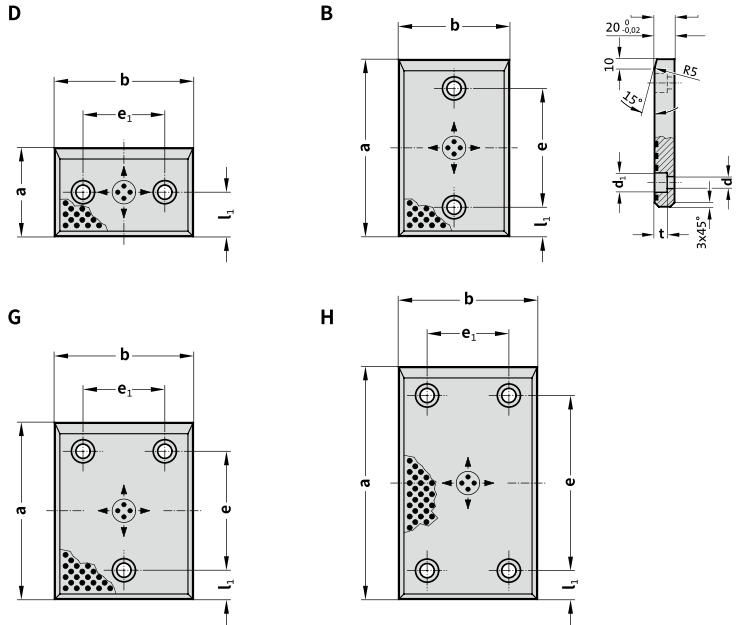

Material 材料:

2212: CuZn25Al5Fe3Mn3 + 固体润滑剂
Solid lubricant
2511: 钢 steel

Description 说明:

2511: 表面高频处理 Surface high frequency processing

硬度 hardness:

2212: $\geq 210\text{HB}$
2511: 55~60HRC

2212. /2511. Guide plate, VDI 3357
2212. /2511. 导板, VDI 3357

形状	b	a	l1	e	e1	d	d1	t	螺栓孔数量
B	50	80	25	30	-	9	15	9	2
B	50	100	25	50	-	13.5	20	13	2
B	50	125	25	75	-	13.5	20	13	2
B	50	160	25	110	-	13.5	20	13	2
B	50	200	25	150	-	13.5	20	13	2
D	80	50	25	-	30	9	15	9	2
B	80	80	25	30	-	13.5	20	13	2
B	80	100	25	50	-	13.5	20	13	2
B	80	125	25	75	-	13.5	20	13	2
B	80	160	25	110	-	13.5	20	13	2
B	80	200	25	150	-	13.5	20	13	2
B	80	250	40	170	-	13.5	20	13	2
B	80	315	40	235	-	13.5	20	13	2
D	100	50	25	-	50	13.5	20	13	2
D	100	80	40	-	50	13.5	20	13	2
B	100	100	25	50	-	13.5	20	13	2
B	100	125	25	75	-	13.5	20	13	2
B	100	160	25	110	-	13.5	20	13	2
B	100	200	25	150	-	13.5	20	13	2

2212. /2511. Guide plate, VDI 3357
2212. /2511. 导板, VDI 3357

形状	b	a	l1	e	e1	d	d1	t	螺栓孔数量
B	100	250	40	170	-	13.5	20	13	2
B	100	315	40	235	-	13.5	20	13	2
D	125	50	25	-	75	13.5	20	13	2
D	125	80	40	-	75	13.5	20	13	2
G	125	100	25	50	75	13.5	20	13	3
G	125	125	25	75	75	13.5	20	13	3
G	125	160	25	110	75	13.5	202	13	3
G	125	200	25	150	75	13.5	20	13	3
G	125	250	40	170	75	13.5	20	13	3
G	125	315	40	235	75	13.5	20	13	3
D	160	50	25	-	110	13.5	20	13	3
D	160	80	40	-	110	13.5	20	13	3
G	160	100	25	50	110	13.5	20	13	3
G	160	125	25	75	110	13.5	20	13	3
G	160	160	25	110	110	13.5	20	13	3
G	160	200	25	150	110	13.5	20	13	3
H	160	250	40	170	110	13.5	20	13	4
H	160	315	40	235	110	13.5	20	13	4

Order 订购 Catalog No. 目录号 . b . a . 厚度
2212 . 050 . 080 . 020
2511 . 050 . 080 . 020